

## Utilities

200 Edenway. White House, TN, 37188  
Phone: 800-672-4911 Fax: 615-672-0733

7/31/2006

Quote Number: 61810013

### Tallahassee Electric Operation

2602 Jackson Bluff Rd  
Tallahassee FL 32301

Attention: Terry Lowe

Phone: 850-891-5531

Fax: 850-891-5162

| Qty. | Description  |
|------|--|
| 1    | <ul style="list-style-type: none"><li>XT-55 Aerial Unit</li><li>-60ft Working Height</li><li>-Vinyl Platform &amp; Control Cover</li><li>-Platform Liner</li><li>-"3D" One Hand Control</li><li>-Shut Off</li><li>-Hydraulic Pump</li><li>-Safety Harness</li><li>_ Outrigger Controls</li><li>-Upper Boom Rest Tie Down</li><li>-On Demand Throttle</li><li>-11" Chip Box with Hoist Assembly and Wire Mesh tail Gate</li><li>-Full Cab guard with Access Steps and Grab Handles</li><li>-Four (4) Door thru Box Assembly</li><li>-PTO</li><li>-Mud Flaps</li><li>-Rear Bumper with T100 Pintle Hook</li><li>-Two (2) Wheel Chocks with Underbody Storage</li><li>-FMVSS Lighting</li><li>- 2.5 lb. Fire Extinguisher</li><li>-All components painted White</li><li>-Trailer Brake Controller</li><li>-6-prong Trailer Socket</li><li>-Triangle Reflector Kit</li><li>-DOT Inspection</li></ul> |

Qty. Description

|                     |                    |
|---------------------|--------------------|
| <b>Grand Total:</b> | <b>\$56,280.00</b> |
| <b>FET Tax</b>      | <b>\$0.00</b>      |
| <b>Grand Total</b>  | <b>\$56,280.00</b> |

**Notes:**

1. Prices are FOB Shipping Point, delivery prepaid and included.
2. Prices exclude any applicable taxes or license fees.
3. Federal Excise Tax has not been included. A current exemption/resale certificate must be on file and provided with purchase order for tax exempt sale. Federal Excise Tax will be added if certificate is not supplied with order..
4. Terms: Net 10 days with pre-approved credit..
5. Quotation good for 30 days. Contact us for a possible extension if required.
6. Chassis requires clean frame rails, side and top. Relocation of chassis components, to facilitate equipment installation, will be in addition to above quoted price.
7. Terex Telelect is ISO 9001 :2000 Certified.

**Terex Utilities South – White House**

**Accepted By:**

\_\_\_\_\_  
**Order Coordinator—Josh Fawley**

\_\_\_\_\_

**Account Manager –Charlie Mathews**

**PO Number:** \_\_\_\_\_

**Date:** \_\_\_\_\_

# TEREX

*Utilities*

Aerial Devices | Hi-Ranger Overcenter Aerial Device For Tree Trimming




# XT

Aerial Devices

# XT Series Tree Trimmer Transverse Lift

The XT Series is also available with a 10 foot Transverse lift. The lift mounts conveniently between the cab and the chipper box providing you with 10 feet more working height. Make your 57 foot working height unit a 67 foot unit or your 65 foot working height unit a 75 foot unit with the addition of the Transverse Lift. The Transverse Lift provides you with more working capability to cover more area, more conveniently.

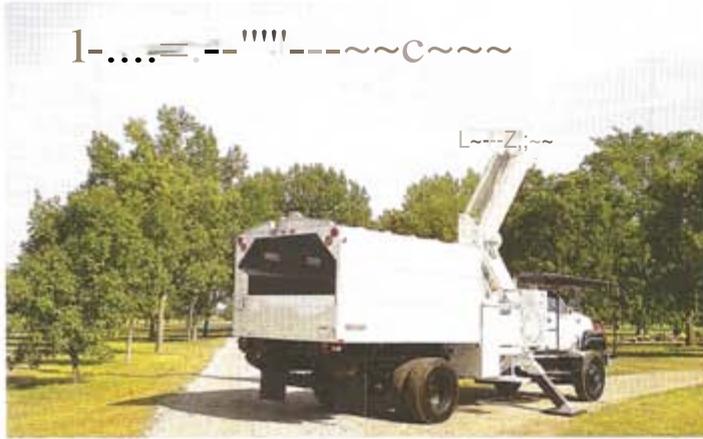

The TEREX Utilities Hi-Ranger XT Series Tree Trimmers offer a work zone reach that meets or exceeds most 55 foot models, allowing for a more compact and maneuverable travel package. With a horizontal reach of 42.5 feet on the XT-52 to 49.9 feet on the XT-60, productivity will increase as re-positioning of the truck is minimized. The side-by-side boom design (patent pending) of the XT Series allows for reduced travel length of only 11.9 feet when mounted over a chipper box.

## **BEHIND CAB CAPACITIES & DIMENSIONAL DATA**

|  |   | XT-52/62          | XT-55/65          | XT-58/68          | XT-60/70          |
|--|---|-------------------|-------------------|-------------------|-------------------|
| Horizontal Reach (NOC)                     | A | 42.5 ft. (12.9 m) | 42.5 ft. (12.9 m) | 43.8 ft. (13.4 m) | 44.9 ft. (13.7 m) |
| Horizontal Reach (OC)                      | B | 42.0 ft. (12.8 m) | 44.9 ft. (13.7 m) | 48.0 ft. (14.6 m) | 49.9 ft. (15.2 m) |
| Bottom of Platform Height                  | C | 62.0 ft. (18.9 m) | 65.0 ft. (19.8 m) | 68.0 ft. (20.7 m) | 70.0 ft. (21.3 m) |
| Working Height                             | O | 67.0 ft. (20.4 m) | 70.0 ft. (21.3 m) | 73.0 ft. (22.3 m) | 75.0 ft. (22.9 m) |
| Overall Stored Length                      |   | 28.3 ft. (8.6 m)  | 30.2 ft. (9.2 m)  | 31.5 ft. (9.6 m)  | 33.5 ft. (10.2 m) |
| Overall Stored Height with Transverse Lift |   | 11.9 ft. (3.6 m)  |

## **BEHIND CAB MOUNT VEHICLE SPECIFICATIONS**



|                                 | XT-52/62 & XT-55/65    | XT-58/68               | XT-60/70               |
|---------------------------------|------------------------|------------------------|------------------------|
| GVWR with Transverse Lift       | 31,000 lb. (14,062 kg) | 33,000 lb. (14,969 kg) | 33,000 lb. (14,969 kg) |
| Front Axle with Transverse Lift | 12,000 lb. (5,443 kg)  | 14,000 lb. (6,350 kg)  | 14,000 lb. (6,350 kg)  |
| Rear Axle with Transverse Lift  | 19,000 lb. (8,618 kg)  | 19,000 lb. (8,618 kg)  | 19,000 lb. (8,618 kg)  |

The 10 foot Transverse lift will work with units with or without a chipper box. When the controls are mounted on the cross body, a step is provided for the operator to stand on.



The Transverse Lift is also available on the rear axle mount XT units. Mounting a unit over the rear axle requires the use of two sets of outriggers. Check out the 10 foot Transverse lift on your next unit. Remember, the XT Series is available in a 52 foot, 55 foot, 58 foot, or 60 foot model. Add the transverse lift, you have four more sizes with up to 75 feet of working height available.


***\*Contact your local TEREX Utilities Distributor for statistical data regarding the Over the Rear Axle Mount Units.***

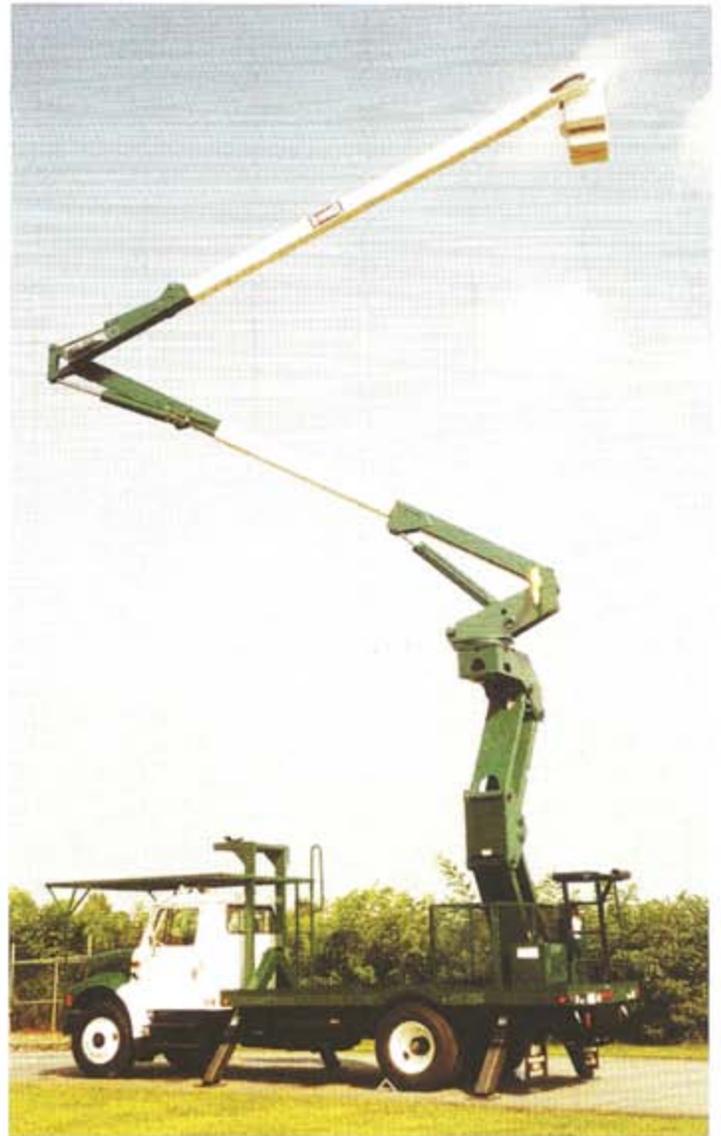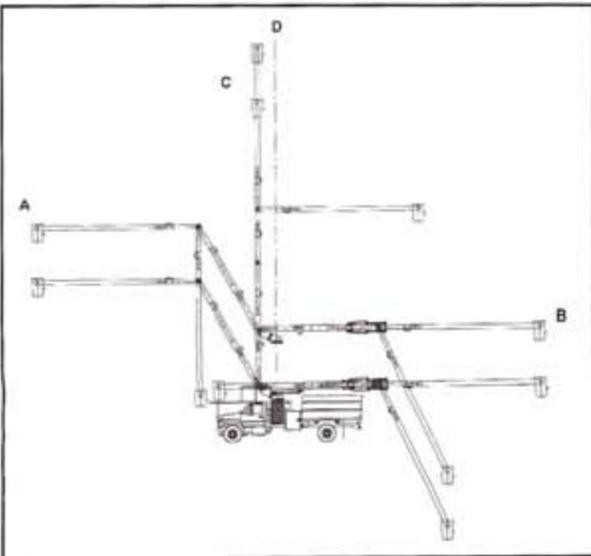

Contact your distributor today and check out what the addition of the optional Transverse Lift can do for your XT Series unit.

**BEHIND CAB CAPACITIES & DIMENSIONAL DATA**

|                           |   | <b>XT-52</b>         | <b>XT-55</b>         | <b>XT-58</b>         | <b>XT-60</b>          |
|---------------------------|---|----------------------|----------------------|----------------------|-----------------------|
| Platform Capacity         |   | 350 lb.<br>(159 kg)  | 350 lb.<br>(159 kg)  | 350 lb.<br>(159 kg)  | 350 lb.<br>(159 kg)   |
| Lower Boom Travel         |   | 135°                 | 125°                 | 120°                 | 120°                  |
| Upper Boom Travel         |   | 270°                 | 260°                 | 245°                 | 245°                  |
| Horizontal Reach (NOC)    | A | 42.5 ft.<br>(12.9 m) | 42.5 ft.<br>(12.9 m) | 43.8 ft.<br>(13.4 m) | 44.9 ft.<br>(13.7 m)  |
| Horizontal Reach (OC)     | B | 42.0 ft.<br>(12.8 m) | 44.9 ft.<br>(13.7 m) | 48.0 ft.<br>(14.6 m) | 49.9 ft.<br>(15.2 m)  |
| Bottom of Platform Height | C | 52.0 ft.<br>(15.8 m) | 55.0 ft.<br>(16.8 m) | 58.0 ft.<br>(17.7 m) | 60.0 ft.<br>(18.3 m)  |
| Working Height            | D | 57.0 ft.<br>(17.4 m) | 60.0 ft.<br>(18.3 m) | 63.0 ft.<br>(19.2 m) | 65.0 ft.<br>(19.8 m)  |
| Overall Stored Length     |   | 28.3 ft.<br>(8.6 m)  | 29.8 ft.<br>(9.1 m)  | 32.3 ft.<br>(9.8 m)  | 33.3 ft.<br>(to. 1 m) |
| Overall Stored Height     |   | 11.9ft.<br>(3.6 m)   | 11.9ft.<br>(3.6 m)   | 11.9ft.<br>(3.6 m)   | 11.9ft.<br>(3.6 m)    |

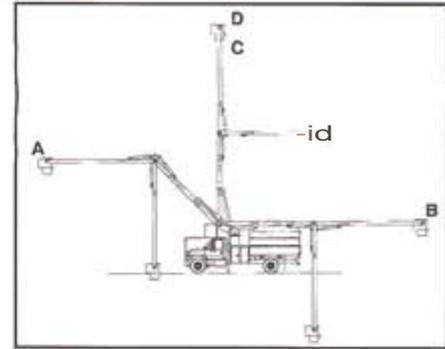

*\*Contact your local TEREX Utilities Distributor for statistical data regarding the Over the Rear Axle Mount Units.*

**VEHICLE SPECIFICATIONS**

|             | <b>XT-52 &amp; XT-55</b> | <b>XT-58</b>           | <b>XT-60</b>           |
|-------------|--------------------------|------------------------|------------------------|
| Cab to Axle | 120 in. (305 cm)         | 120 in. (305 cm)       | 138 in. (351 em)       |
| Wheel Base  | 192 in. (488 cm)         | 192 in. (488 em)       | 210 in. (533 em)       |
| GVWR        | 26,000 lb. (11,794 kg)   | 27,500 lb. (12,474 kg) | 27,500 lb. (12,474 kg) |
| Front Axle  | 9,000 lb. (4,082 kg)     | 10,500 lb. (4,763 kg)  | 10,500 lb. (4,763 kg)  |
| Rear Axle   | 17,000 lb. (7,711 kg)    | 17,000 lb. (7,711 kg)  | 17,000 lb. (7,711 kg)  |

**STANDARD EQUIPMENT**

- 24 x 24 x 40 in. One-Person Side Mount Platform
- Safety Harness With Attached Lanyard
- Control-Plus Individual Lever, Full Pressure Platform Controls
- Hydraulic Stop At Platform Controls
- Positive Mechanical Platform Leveling System
- Full Pressure, Open Center Hydraulic System
- Oil Level Sight Gauge On Reservoir
- Two Speed Engine Throttle At Platform Controls
- Continuous Unrestricted Worm Gear Rotation
- Category "C" Rating Per ANSI A92.2
- 35 Gallon Hydraulic Oil Reservoir
- Dual Hydraulic Tool Outlets At Platform
- Padded Upper Boom Rest With Tie Down
- Lower Boom Rest
- Boom Interlock

**OPTIONAL EQUIPMENT**

- 24 x 30 x 42 in. One-Person Side Mount Platform
- Platform Covers and Liners
- Control-Plus "3-D" Single Stick
- Automatic Demand Throttle System
- Engine Stop/Start At Platform
- Components To Meet Category "B" Rating
- Boom/Boom Stow Interlock
- Mechanical Platform Tilt
- Hydraulic Platform Tilt
- Auxiliary Let Down System
- Shut Off Valve For Hydraulic System Reservoir
- Various Types of Outriggers
- Lower Boom Lift Eye
- Outrigger Controls With Chipper Box Control
- Hydraulic Tool Outlets Below Rotation
- Transverse Lift (Adds 10 ft. of Working Height)
- Boom Overstow Protection

Photographs represented in this literature are for informational purposes only and may depict optional or additional equipment not offered as standard. Always refer to the appropriate operator's manual for safe and proper operation of TEREX Telelect equipment. TEREX Telelect reserves the right to make design changes as necessary.

**For More Information:**

**~TEREX  
Utilities**

Phone: (605) 882-4000  
Facsimile: (605) 882-1842

www.terexutilities.com  
E-mail: sales@terexutilities.com