

Utilities

100 Edenway, White House, TN, 37188
Phone: 800-672-4911 Fax: 615-672-0733

8/3/2006

Quote Number: 61810026

Tallahassee Electric Operation
2602 Jackson Bluff Rd
Tallahassee FL 32301

Attention: Terry Lowe

Phone: 850-891-5531

Fax: 850-891-5162

Qty.	Description
1	GT2000HY Engine: Caterpillar 3126 HEUI Electronic Diesel Engine @ 250HP Electrical engine shut down Ether type cold start aid ,engine block heater 12 Volts 100 Amp Electrical system 1 Stage air filter c/w Vortex dust remover, Spark arrester muffler

Cab:

One-person insulated cab with suspension
Integral RaPS design, certified to SAE J 1040C standard
Suspension operator seat
LH and RH sliding windows, Sun roof for ventilation
circulating fan, sun visor, Dust filter, Heater, defroster
2 front headlights, 2 rear lights

Transmission:

Fully hydrostatic transmission Micro processor controlled
Service brake: positive deceleration through hydrostatic system
Parking brake: spring applied, pressure released, multidisc
(automatic applic. of parking brake upon door opening)
Hydrostatic oil tank heater

Suspension :

Walking beams mounted on urethane bushings
8 wheels with solid rubber tires
Oil bath type heavy duty hubs c/w mechanical seals
Heavy duty Urethane sprockets front and rear
Hydraulic track adjusters
Limp home kit, Micro Processor electronic display module

Micro Processor drive:

Electronic Steering wheel drive, hand throttle,
Electronic speed pedal
Open door detection switch
Display module for MP

(/~

Description

Instrumentation :

Engine oil pressure, water temperature, transmission temperature,
Voltmeter, fuel level, hour meter, tachometer. Hydrostatic oil temperature,
Lights and / or alarms for:
High hydrostatic oil temperature, high water temperature, low battery charge,
Parking brake, engine low oil pressure, hydrostatic low oil level, open door, ether

Additional Services:

Fire extinguisher
Back up alarm
Fuel tank
Front winter Blanket
Easy freewheeling for towing capability
Standard color: Cab Bombardier white
Frame, side deck and suspension black
2 sets of Parts and operations manuals
Pre-service
Standard Warranty, 1 year /1000 hours witch occur first

Grand Total:	\$163,540.00
FET Tax	\$0.00
Grand Total	\$163,540.00

Options:

	Add
33 inch Flat Track with 6 ply belting	\$4,877.00
2 Man Cab ROPS J1040 45000Lbs	\$11,183.00
5 Man Cab (not ROPS)	\$16,000.00
Radio AM/FM/CD c/w antena and 2 speakers	\$366.00
Passenger Suspension seat	\$796.00
Rear Windshield Wiper c/w washer	\$248.00
Espar D5 Airtronic Cab Heater c/w 7 Days electronic control	\$3,199.00
Electronic Inclinometer side to side and front to rear	\$388.00
Set of Exterior mirrors (LH side installed on cab,RH side shipped loose)	\$630.00
Air Conditioning	\$4,302.00
Brushguard on lower front window	\$269.00
Flat Checker Plate Steel Deck	\$3,511.00
Wooded Side Rails	\$882.00

	Add
Rear Winch 20,000 lbs 2 speeds c/w hydraulic system	\$13,366.00
Front Winch 20,000 lbs, 2 speeds, c/w hydraulic system	\$13,366.00
Front Winch 30,000 lbs, 2 speed, c/w hydraulic system	\$16,522.00
Winch Cable diameter 5/8" x 250 ft. with swag eye	\$726.00
Winterizing Kit coolant heater espar D5W hydronics c/w 7 day electronic control	\$3,199.00
Rear Pintle Hook (30,000 lbs)	\$269.00
Anti-Vandalism protection kit (provision for padlock on reservoir and battery box)	\$323.00
Extra Set of Manuals (Operation, Parts)	\$296.00
Other Colors are available on demand	\$1,194.00

Notes:

1. Prices are FOB Shipping Point, delivery prepaid and included.
2. Prices exclude any applicable taxes or license fees.
3. Federal Excise Tax has not been included. A current exemption/resale certificate must be on file and provided with purchase order for tax exempt sale. Federal Excise Tax will be added if certificate is not supplied with order.
4. Terms: Net 10 days with pre-approved credit.
5. Chassis payment is due upon chassis receipt at our facility.
6. Quotation good for 30 days. Contact us for a possible extension if required.
7. Terex Telelect is ISO 9001 :2000 Certified.

Terex Utilities South – White House

Accepted By:

Order Coordinator—Josh Fawley

Account Manager –Charlie Mathews

PO Number: _____

Date: _____




GT 2000

Camoplast is now the proud owner
of **Bombardier Recreational Products Industrial Division**

As the world's leading producer of rubber tracks for snowmobiles, agriculture and utility applications, being the leading manufacturer of North American groomers to the **Camoplast** group is a natural fit.

Camoplast is committed to the utility industry and will provide customers with quality support and innovative dependable products for years to come.



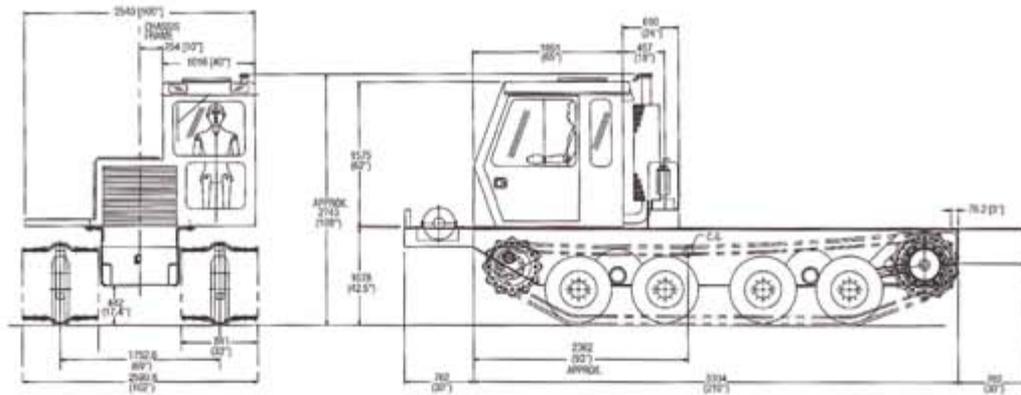

GT 2000 Specifications

DIMENSIONS

Overall length without extension	5334 mm	210 in
Overall width	2591 mm	102 in
Overall height	2743 mm	108 in
Ground clearance	442 mm	17 in

PERFORMANCE

Curb weight (basic vehicle)	9072 kg	20000lb
Payload	9072 kg	20000lb
Maximum speed	9.4 km/h	5.8 mph
Fording depth	1078 mm	43 in
Turning radius	0m	0 in
Ground pressure (no penetration)		
Basic vehicle	181 g/cm ²	2.57 psi
Loaded vehicle	362 g/cm ²	5.14 psi
Ground pressure (6 in. penetration)		
Basic vehicle	140 g/cm ²	2.00 psi
Loaded vehicle	281 g/cm ²	4.00 psi
Gradeability		
Uphill / Downhill	60%	
Sidehill	40%	

ENGINE

Make	Caterpillar	
Model	3126B	
Type	Turbo diesel, electronic fuel system, EPA Tier II	
Number of cylinders	6	
Displacement	7.24 L	442 in ³
Power @ 2500 RPM	186 kW	250 HP
Torque @ 1500 RPM	971 N-m	7161b-ft.

DRIVE TRAIN

Pump drive	
Make	Funk
Type	Triple pads
Hydrostatic pumps	
Make	Sauer-Danfoss
Type	Axial, variable displacement
Hydrostatic motors	
Make	Sauer-Danfoss
Type	Axial, fixed displacement
Planetaries	
Make	Fairfield

CONTROL

Type	Microprocessor
Inputs	Steering wheel, Forward-Neutral-Reverse lever and speed pedal
Outputs	Independent control of each track
Other feature	Anti-stall

ELECTRICAL

Voltage	12V
Alternator	115 Amps.
Batterie	2 x 950 CCA

SUSPENSION

Type	Walking beam
------	--------------

WHEELS

Quantity	8
Type	solid
Dimensions	650 x 16

TRACKS

Type	D-Dent, Hardened Steel
Width	838 mm 33 in
Belt	Rubber, 6 ply
Tensionner	Cylinder filled with grease

CHASSIS

Type	Tub
Drain plug	yes
Access panels	yes

CAPACITIES

Cooling system	40 l	10.6 US gal
Fuel tank	250 l	66 US gal
Hydrostatic tank	100l	26 US gal

PROVISION FOR EXTRA HYDRAULIC PUMP

Location	Top pad on triple pump drive
Flange type	SAE B - 4 in. dia. pilot
Shaft type	SAE B - 13 teeth, 16/32 pitch
Direction of rotation	CCW (when looking at pump shaft)
Max. rotational speed	3500 RPM

OPTIONAL EQUIPMENT

One person or two person cab
Front winch, 20,000 lbs capacity
Winterizing kit
Winter radiator blanket
Air conditioning
Heavy duty brushguards
Rear pintle hook
Set of 4 D-rings
Electronic inclinometer

