

Utilities

200 Edenway, White House, TN, 37188
Phone: 800-672-4911 Fax: 615-672-0733

7/28/2006

Quote Number: 61810006

Tallahassee Electric Operation
2602 Jackson Bluff Rd
Tallahassee FL 32301

Attention: Terry Lowe

Phone: 850-891-5531

Fax: 850-891-5162

Qty.	Description
1	One (1) new Terex-Utilities Telelect Commander 5045 model hydraulic rotating digger derrick with a TM winch.

Design Criteria:

* Terex Utilities digger derricks are designed in accordance with current industry and engineering standards applicable and accepted for structural and hydraulic design.

Elevation:

* From +80 degrees above horizontal to -20 degrees below horizontal.

Pedestal & Turntable:

* Square constructed pedestal has access holes for maintenance of hydraulic plumbing. The turntable is an off-set design to provide maximum stability and strength. The turntable is fabricated from high-strength steel side plates and a single-piece bottom plate.

Dual Lift Cylinders:

* Double-acting cylinders with chrome plated rods and integral holding valves. Trapezoid mounting design offers greater boom support and stability, which means less wear and longer life; plus, either cylinder can hold the rated lifting capacity of the derrick.

Steel Main Boom Section:

* The main boom section is a fabricated box utilizing high-strength steel plates.

Steel Second Boom Section:

* Fabricated box constructed of high strength steel.. Powered by a double acting hydraulic cylinder equipped with integral holding valves on both extend and retract ports.

Fiberglass Hydraulic Third Boom Section:

* Capable of lifting the hydraulic capacity of the derrick in all positions.

* Certified for rated line voltage up to and including 46 KV AC.

* Tapered non-metallic rollers mounted at the end of the second section support the fiberglass boom under load minimizing scratches and abrasions. The sides of the fiberglass boom are supported and guided by non-metallic rollers to prevent tracking.

Description

Boom Interlock:

* To operate the boom the outriggers must be extended.

Continuous & Unrestricted Rotation:

* A Terex-Telelect designed and manufactured collector block provides a rotating oil distribution system for continuous and unrestricted rotation. Planetary gear drive rotation including spring loaded hydraulically released parking brake and reversible hydraulic motor (non-slip rotation).

Hydraulic System:

- * Tandem vane type high efficiency 3000 psi rated hydraulic pump providing 43.5 gallons per minute (at 2000 RPM and 2500 psi).
- * 50 hydraulic oil reservoir includes 10 micron replaceable cartridge type return line filter mounted in reservoir with bypass valve incorporated in filter to prevent restricted flow.
- * A 100 mesh in screen in filter cap. A 40 mesh screen included in tank outlet.. Shut off valve.
- * Glycerin filled pressure gauge to monitor circuit pressures.
- * Relief valves to protect the derrick circuits and digger-winch circuits.
- * Hydraulic hoses are equipped with permanent type hose fittings.

Miscellaneous:

- * A load chart stating actual lifting capacity considering all final options, chassis, body, outriggers, and other fixed equipment with final readings based on completed unit stability is included.
- * A boom-angle indicator and decal are mounted on each side of the main boom.
- * The entire unit is painted with rust inhibiting primer.
- * Two complete manuals providing operational and maintenance procedures, and a replacement parts listing.
- * Warning decals provided with unit.

Turret Mount Winch Including Transferable Pole BUddy Assembly:

* 15,000 lb. bare drum capacity worm gear winch equipped with adjustable brake mounted on the derrick turntable. Equipped with flanged pole buddy transferable from 2nd section to 3rd section.

Bare Boom Lift Capacities:

* Boom Angle:	Boom Retracted	2nd Boom Extended	2nd and 3rd Extended
Maximum Elevation	30000	27810	20010
* 10Ft. Radius	16050	14010	13080
* 45 Degree Boom Angle	13160	8200	5990
* 0 Degree Boom Angle	8300	5120	3690

Sheave Height:

- * With 2nd section extended, 37.2 ft. at maximum elevation.
- * With 3rd section extended, 45.6 ft. at maximum elevation.
- * Dimensions are based on a 40" chassis frame height.

Load Radius:

- * 27.6 ft. from *CIL* of rotation, at 0 degree, 2nd section extended.
- * 36.1 ft. from *CIL* of rotation, at 0 degree, 3rd section extended.

Worm gear rotation in lieu of standard non-slip planetary rotation.

r~

Description

1

Command Post With "EXCLUSIVE SINGLE STICK Tn Control:

* Control allows one hand to operate three functions: rotation, boom elevation, and section boom extension.

* Third section boom extension and other functions have individual controls.

* Glycerin filled pressure gauge is provided to monitor system pressure.

* Permanent type control decals are provided.

* Adjustable cushioned operator seat is provided as standard and includes side rails.

* Hydraulic foot throttle.

* Command post access step and hand rail installed.

* Curb Side

1

Remote Sensor Bracket:

* Bracket to be used with the Williams remote sensor. Installed to supply sensor to work with truck engine.

1

Williams Control

1

Boom rest for digger derrick.

1

PEDESTAL

1

12,000 ft-lb Two Speed Digger With Hydraulic Shift (ESK 76BA):

* Planetary gear drive powered by reversible hydraulic motor:

* 60" long x 2-5/8" hex auger shaft with auger adjustment holes.

* Digger hanger is box section and is equipped with a transfer protection system, auger storage bracket with self latching auger catch, hydraulic auger release, and auger roll-up cable.

* The auger bracket stores up to a 24" diameter auger, in the standard position.

* Telescopic trombone tube is provided to shift the two-speed digger hydraulically.

* Digger storage protection system to protect the auger storage cable from damage caused by over-winding. Oil from the digger system is returned to tank before the cable is over-stressed.

* Street side

1

Tilt Pole Plummer For Transferable Pole BUddy:

* Unique circular design arms handle poles up to 23 in. diameter with the tips touching.

* Hydraulic cylinders equipped with holding valves operate the tilt and open/close on pole plummer arms.

* Pole plummer hoses are contained in a chain type carrier, installed on the side of the boom.

* Transfers from the end of the second section to the end of the third section and vice versa.

* The pole plummer is installed on the transferable pole buddy flange assembly.

1

Tilt Pole Plummer Interlock For Transferable Pole Plummer:

* Protects both the tilt pole plummer and the boom from accidental damage caused by extending the third section boom while the tilt pole plummer is on the second section and tilted downward.

1

Hydraulic Overload Protection for Rotation, 2nd Section, 3rd Section, Winch, Digger Dig & Boom Down:

* Helps prevent damage to derrick when overloads occur.. These systems leave operational those functions necessary to eliminate the overload condition until it is relieved.

* The system is fully automatic relative to the operation and re-set functions.

1

Power take off, 10-bolt, with indicator light for Allison MD automatic transmission.

Description

1 Electric collector ring 2-conductor. .

1 Full length subframe for 120" CT chassis.

1 Tie down kit.

2 Extra Heavy Duty A-frame Outriggers:

* Hydraulic double acting outriggers including integral holding valves.

* 146.7" spread pin to pin and 157.5" to outside of pads at 9.6" penetration and 40 " frame height..

* 13 " x 12 " swivel type stabilizer pads.

1 Controls For 2-Sets Of Outriggers:

* Recessed at rear of truck each side for ease of view for outrigger placement..

* Includes switches and alarm for outrigger in motion alarm.

UTILITY BODY

1 LLB 168 Utility Line Body:

A. Dimensions

-168" overall length

-94" outside width

-58" bed width

-28" floor to top of body

-18" compartment depth

-46" compartment height

-24" horizontal compartment height

B. Compartmentation - Street Side

-First Vertical (30") - 5 material hooks (1-3-1)

-Second Vertical (30") - 2 adjustable shelves with 5 adjustable dividers each

-Third Vertical (30") - 2 adjustable shelves with 5 adjustable dividers each

-Horizontal (54") - 8 adjustable dividers in compartment bottom

-Rear Vertical (24") - 5 material hooks (1-3-1)

C. Compartmentation - Curb Side

-First Vertical (30") - 5 material hooks (1-3-1)

-Second Vertical (30") - access steps to cargo area

-Third Vertical (30") - 2 adjustable shelves with 5 adjustable dividers each

-Horizontal (54") - 1 adjustable shelf with 8 adjustable dividers

-Rear Vertical (24") - 5 material hooks (1-3-1)

D. Features

-Full length shelf in top of street side compartments with rear drop door

-Wheel chock storage (2) each side in wheel wells

-16-gauge A60 double-sided galvaneal coated steel body exterior

-18/16-gauge A60 double-sided galvaneal coated steel door panels

-12-gauge treadplate floor

-12-gauge tread plate compartment tops

-Rotary door latches and full-length stainless steel rod door hinge

-Chain stops on doors and includes automotive bulb-type door seals

Bridge frame and floor and installation of the subframe and outriggers.

- 1 Description
- 1 Tail shelf 3D" long with 12-gauge treadplate top and full side *skirts*.
- 2 Grab handle for stair type side access steps.
* Located at the side front access
- 4 Pool type pipe grab rail for tailshelf or rear of flatbed.
* Located at the rear of each tailshelf side.
- 3 Cable type gripstrut stirrup step.
* (1) Located at the side access.
* (2) Located at the rear access.
- 1 Access steps mounted on command post.
- 1 Access steps to command post or platform.
- 1 Integral wiring and switches in International chassis for electrical accessories (Diamond Logic).
- 1 Set chassis parameters.
- 1 One pair of mud flaps.
- 1 DOT Inspection.
- Peterson LED 7-lamp DOT Lighting Package:
* Complies with FMVSS 108
* Includes required lights, junction box, wiring harness and mounting light bar.
- 1 Amerex 5-lb ABC fire extinguisher with bracket.
* In the front bin
- 1 James King triangle reflector kit.
- 1 Orion flare kit with holder.
- 1 Paint line body one color.
* White to match the cab
- 1 Paint derrick one color.
- 1 Paint aerial device one color.
* White to match the cab.

	Grand Total:	\$92,568.00
	FET Tax	\$0.00
	Grand Total	\$92,568.00

Options:

Engine stop / start at pedestal.	Add \$202.00
Operator light at controls.	\$187.00
Texoma 9 TXD104-52 auger 9" with steel blade teeth, 5/16" flighting and 2-5/8" hex bushing.	\$742.00 ea.
Texoma 18 TXD104-48 auger 18" with steel blade teeth, 5/16" flighting and 2-5/8" hex bushing.	\$1,007.00 ea.
Texoma 24 TXD104-48 auger 24" with steel blade teeth, 5/16" flighting and 2-5/8" hex bushing.	\$1,189.00 ea.
Nylon roll-up in lieu of steel cable:	\$44.00
Boom Stow Protection For Controls Above Rotation: * Protects against damage from excessive down pressure by cutting off oil supply to the derrick. * Includes a 2 channel electric collector ring.	\$806.00
Controls For 2-Sets Of Outriggers And Auxiliary Tool Outlets Below Rotation: * Recessed at rear of truck each side for ease of view for outrigger placement. * Includes switches and alarm for outrigger in motion alarm.	\$267.00
Remote engine stop / start control from rear of vehicle.	\$487.00
V-nay spring loaded hydraulic hose reel with 4-way roller assembly. .AJrbside rear * Dual Hose Assembly For Hose Reel: * 35' of 1/2" ID hose * Parker HTMA male and female flush faced couplers and dust covers. * Installed on hose reel with ball stop.	\$1,016.00
Bracket for storing grounding cable.	\$166.00
Ground Cable Black 1/0: * 50' of copper cable, three grounding lugs and grounding clamp. * Three point grounding system for grounding vehicle during work operations. * Cable must be fully removed before use.	\$142.00
Ground Cable Black 2/0: * 50' of copper cable, three grounding lugs and grounding clamp. * Three point grounding system for grounding vehicle during work operations. * Cable must be fully removed before use.	\$192.00
Hannay spring rewind grounding reel.	\$961.00
Manual Ground Reel * Terex Utilities Part # FA20001	\$633.00

bidden PD18C-11DB FEB Hydraulic Planetary Front Mounted Bumper Winch Including:

Add
\$6,188.00

- * 20,000-lb rated capacity.
- * Extended shaft to curb side for take-up reel.
- * Four way roller assembly.
- * 200' of 1/2" 6x19 wire rope with eye.
- * Upper and lower winch line guards.
- * Safety tread plate installed around winch.
- * Winch valve, air actuator, miscellaneous hose and fittings.
- * Painted White to Match Chassis

Braden AHGU5 Hydraulic Two Speed Low Mount Rear Mounted Winch Including:

\$5,855.00

- * 20,000-lb rated capacity.
- * Extended shaft to curb side for take-up reel.
- * Four way roller assembly.
- * 200' of 1/2" 6x19 wire rope with eye.
- * Upper and lower winch line guards.
- * Safety tread plate installed around winch.
- * Winch valve, air actuator, miscellaneous hose and fittings.

Braden PCD24B Hydraulic Capstan Drive:

\$3,835.00

- * 4,000-LB rating.
- * Spring applied hydraulically released parking brake.

Reversible Take-up Reel:

\$722.00 ea.

- * 10,000-lb maximum pulling force.
- * 20" diameter, 28" overall.
- * Bayonet style socket fits 2-7/16" shaft.

CR reel storage bracket.

\$330.00

Winch control installed in chassis cab.

\$395.00

Winch control installed at front bumper

\$395.00

Flag Holders

\$57.00

- * Terex Utilities Part # FOP10067

Bumper Markers

\$69.00

- * Terex Utilities Part # BA30066

Master door rod lock system.

\$206.00

**Add
(Deduct)**
\$-880.00

hcttbed, 12-ft heavy duty with 12-gauge tread plate deck.
T40 Transverse Saddle Compartment: 40" wide x 48" high x 94" across with 24" deep compartments.

A. Compartmentation - Curb Side

- 1 fixed thru shelf in forward portion above material drawers
- 1 pull out drawer in forward portion, 4" D x 42" L, adjustable dividers on 6" centers
- 2 pull out drawers in forward portion, 6" D x 42" L, adjustable dividers on 6" centers
- Pull out tool board in rear portion

B. Compartmentation - Street Side

- 4 fixed material hooks (2-0-2)

C. Features

- Tie rail on three sides.
- Double overlapping doors equipped with door chains.
- 16-gauge body materials, 12-gauge compartment top.
- Rod and socket door hinge.
- Slam action paddle type door latches.
- Chain stop on doors.
- Automotive bulb type weather stripping.
- Wheel Chock Pockets
- Bridge Frame Sub frame & outriggers

Reading Body in lieu of Terex Utilities Standard Body
* 168 " Line Body

\$ 2,353.00

Compartment With Side Drop Down Door:

\$687.00 ea.

- * 12-gauge tread plate top.
- * 18'W x 18"H x 36"L.
- * Equipped with rotary paddle latch and chain stops.

Compartment With Side Drop Down Door:

\$761.00 ea.

- * 12-gauge tread plate top.
- * 18'W x 18"H x 60"L.
- * Equipped with rotary paddle latch and chain stops.

Compartment With Side And End Drop Down Doors:

\$933.00 ea.

- * 12-gauge tread plate top.
- * 18'W x 18"H x 36"L.
- * Equipped with rotary paddle latch and chain stops.

Compartment With Side And End Drop Down Doors:

\$981.00 ea.

- * 12-gauge tread plate top.
- * 18"W x 18"H x 60"L.
- * Equipped with rotary paddle latch and chain stops.

Compartment With Two Side Drop Down Doors:

\$996.00 ea.

- * 12-gauge tread plate top.
- * 18'W x 18"H x 60"L.
- * Equipped with rotary paddle latch and chain stops.

Add
\$1,128.00 ea.

Compartment With Two Side Drop Down Doors:
* 12-gauge tread plate top.
* 18'W x 18"H x 120"L.
* Equipped with rotary paddle latch and chain stops.

\$1,199.00 ea.

Compartment With Two Side Drop Down Doors And One End Drop Down Door:
* 12-gauge tread plate top.
* 18'W x 18"H x 60"L.
* Equipped with rotary paddle latch and chain stops.

\$1,299.00 ea.

Compartment With Two Side Drop Down Doors And One End Drop Down Door:
* 12-gauge tread plate top.
* 18'W x 18"H x 120"L.
* Equipped with rotary paddle latch and chain stops.

\$571.00 ea.

Compartment With Top Opening Lid:
* 12-gauge tread plate top.
* 18'W x 18"H x 36"L.
* Equipped with earn-action hasp and chain stops.

\$628.00 ea.

Compartment With Top Opening Lid:
* 12-gauge tread plate top.
* 18'W x 18"H x 60"L.
* Equipped with earn-action hasp and chain stops.

\$801.00 ea.

Compartment With Top Opening Lid:
* 12-gauge tread plate top.
* 18'W x 18"H x 120"L.
* Equipped with earn-action hasp and chain stops.

\$1,021.00 ea.

Compartment With Two Split Top Opening Lids:
* 12-gauge tread plate top.
* 18'W x 18"H x 120"L.
* Equipped with earn-action hasp and chain stops.

\$1,021.00 ea.

Compartment With Two Overlapping Top Opening Lids:
* 12-gauge tread plate top.
* 18'W x 18"H x 120"L.
* Equipped with earn-action hasp and chain stops.

\$867.00 ea.

Compartment With Top Opening Lid And One End Drop Down Door:
* 12-gauge tread plate top,
* 18"W x 18"H x 60"L.
* Equipped with rotary paddle latch and earn-action hasp and chain stops.

\$981.00 ea.

Compartment With Top Opening Lid And One End Drop Down Door:
* 12-gauge tread plate top.
* 18'W x 18"H x 120"L.
* Equipped with rotary paddle latch and earn-action hasp and chain stops.

Add
\$736.00 ea.

Compartment With End Drop Down Door:
* 12-gauge tread plate top.
* 18"W x 18"H x 60"L.
* Equipped with rotary paddle latch and chain stops.

\$851.00 ea.

Compartment With End Drop Down Door:
* 12-gauge tread plate top.
* 18"W x 18"H x 120"L.
* Equipped with rotary paddle latch and chain stops.

\$762.00 ea.

Compartment With Side Vertical Door:
* 12-gauge tread plate top.
* 24" W x 18"O x 46" H.
* Equipped with rotary paddle latch and chain stops.

Laminated wood outrigger pad 24" x 24" x 2-1/4" with rope handle.

\$143.00 ea.

Outrigger pad storage brackets.
* Under each body side front and rear axle.

\$299.00 ea.

Dica 18" x 18" poly outrigger pads.

\$91.00 ea.

Rubber wheel chocks with eye bolt.

\$40.00 ea.

Hour meter for power take off engagement time or engine hours, specify.

\$86.00

Level indicator, pointer type.
* Rear of bin both sides.

\$36.00

Horizontal enclosed ladder box with rubber covered rear roller:
* 16-gauge construction.

\$470.00

Possum belly door at rear.

\$178.00

Ice Chest Bracket

\$206.00

Golight 7900 spotlight with wireless remote.

\$474.00 ea.

Whelen L32L Super LED Strobe Lights

\$423.00 ea.

Whelen 500 Series TIR Super LED
* Part # 50C03ZAR

\$312.00 ea.

Unity AG-R-H halogen 6" spotlight with mounting bracket.

\$221.00 ea.

VISTA strip compartment light.
* Compartment Lighting for all (10) Body Compartments

\$714.00 ea.

oLight
* Terex Utilities Part # LA75003

\$347.00 ea.

Whelen Far Strobe lights * Whelen Part # 50A-OO-Far Strobe Lights	Add \$158.00 ea.
Stanley Crimper * Terex Utilities Part # STNCT10016N	\$1,717.00
Stanley Pole Tamp * Terex Utilities Part # STNTA54103	\$1,012.00
Mule Tape Driver * M 15 * Includes Torque Wrench, Reel, & 1,500 ft of Mule Tape	\$4,397.00
Redi-Line DA12L electric generator, 1600W, 120VAC, 15A.	\$1,328.00
Dimensions Inverter * Terex Utilities part # FA26002	\$1,146.00
12 Volt Power Outlet	\$112.00
1" x 100' Samson, 2-IN-1 Stable Braid rope.	\$260.00
Gunnebo Johnson 7JH swivel hook.	\$359.00
White spool and shield for winch rope.	\$94.00
Miller #61 down haul weight.	\$350.00
Shackle 1".	\$67.00
Two part line attachment.	\$30.00
Crosby Laughlin * Part # 8.5.S.1	\$953.00
Paint body floor with non-skid paint. * Black	\$130.00
Paint Boom Safety Yellow in lieu of Standard White	\$771.00
Reflective Tape * Terex Utilities Part # LA20035	\$108.00
Midland 7-prong trailer socket	\$125.00
Buyer Products tow hooks, one pair.	\$165.00
Takonsha Voyager electric brake control.	\$254.00

.25A, 15 ton pintle hook:

- * Safety chain eyes.
- * Chassis frame reinforcements.

**Add
\$586.00**

One pair of rubber dock bumpers at rear.

\$115.00

Notes:

1. Prices are FOB Shipping Point, delivery prepaid and included.
2. Prices exclude any applicable taxes or license fees.
3. Federal Excise Tax has not been included. A current exemption/resale certificate must be on file and provided with purchase order for tax exempt sale. Federal Excise Tax will be added if certificate is not supplied with order.
4. Terms: Net 10 days with pre-approved credit.
5. Quotation good for 30 days. Contact us for a possible extension if required.
6. Chassis requires clean frame rails, side and top. Relocation of chassis components, to facilitate equipment installation, will be in addition to above quoted price.
7. Terex Telelect is ISO 9001 :2000 Certified .

Terex Utilities South – White House

Order Coordinator—Josh Fawley

Account Manager –Mathews

Accepted By:

PO Number: _____

Date: _____



~TEREX

Utilities

Digger Derrick | TEREXTelelect Commander 5000 Series



COMMANDER 5000

Digger Derrick


STANDARD FEATURES AND EQUIPMENT

- Continuous Unrestricted Planetary Gear Rotation
- Pedestal Mounted Handle Rack Controls
- Custom Made Zoned Load Chart
- 50 Gallon Hydraulic Oil Reservoir
- Three Section Boom (VV1 Fiberglass Hydraulic Third Section)
- Maximums Exceeds ANS A10.3f
- Pole Buddy On Second Section
- Boom Interlock

OPTIONAL EQUIPMENT

- Tilt Pole Plummer
- Transferable Pole Buddy
- Diggers / Augers
- Various Types of Outriggers
- Various Types of Controls
- Pole Puller
- Fiberglass Personnel Platform
- Full Pressure Top Controls
- Start / Stop and Throttle Advance at Top Controls
- Hydraulic Overload Protection
- Material Handling Jibs
- Planetary Slip Brake Rotation
- Manual Fiberglass 4th Section (Adds 4. feet)

WORKING ENVELOPE

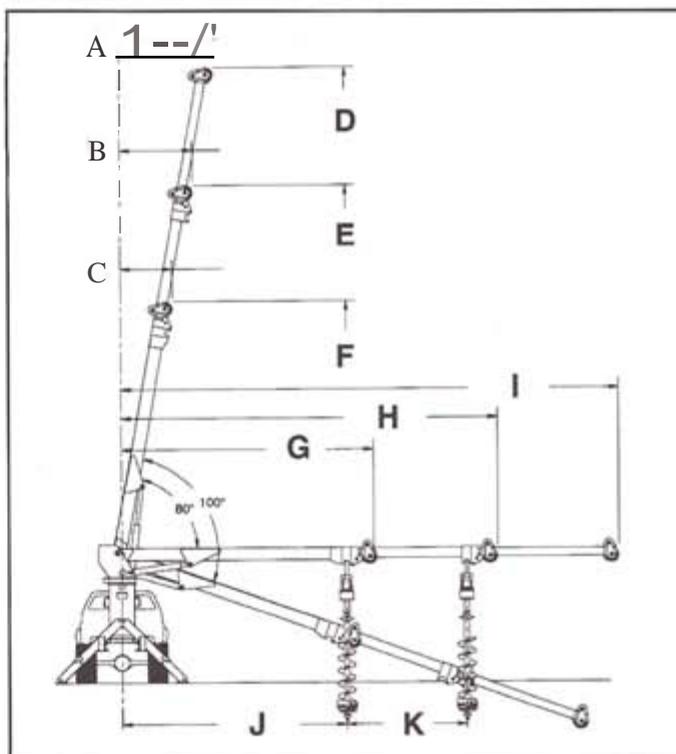

CAPACITIES & DIMENSIONAL DATA

Model	Maximum Capacity	Capacity @ 10 ft Radius	Load Radius			Sheave Height			Horizontal Reach			Digging Radius	
			A	B	C	D	E	F	G	H	I	J	K
CMDR 5045													
TM Winch	30,000lb (13,608 kg)	16,000lb (7,258 kg)	6.1 It (1.9 m)	4.6 It (1.4 m)	3.1 It (1.0m)	45.6 It (13.9 m)	37.2 It (11.3 m)	28.9 It (8.8 m)	19.1 It (5.8 m)	27.6 It (8.4 m)	36.1 It (11.0 m)	16.1 It (4.9 m)	8.5 It (2.76 m)
PG Winch	30,000lb (13,608 kg)	14,600lb (6,623 kg)	6.0 It (1.8 m)	5.1 It (1.6 m)	3.6 It (1.31 m)	45.0 It (13.7 m)	36.3 It (11.1 m)	27.9 It (8.5 m)	18.2 It (5.5 m)	26.7 It (8.1 m)	35.5 It (10.8 m)	16.1 It (4.5 m)	8.5 It (2.6 m)
CMDR 5048													
TM Winch	30,000lb (13,608 kg)	15,350lb (6,963 kg)	6.6 It (2.0 m)	5.0 It (1.5 m)	3.4 It (1.0 m)	48.6 It (14.8 m)	39.7 It (12.1 m)	30.8 It (9.4 m)	21.1 It (6.4 m)	30.1 It (9.2 m)	39.1 It (11.9 m)	18.1 It (5.5 m)	9.0 It (2.7 m)
PG Winch	27,860lb (12,637 kg)	13,700lb (6,214 kg)	6.5 It (2.0 m)	5.6 It (1.7 m)	4.0 It (1.2 m)	48.0 It (14.6 m)	38.7 It (11.8 m)	29.9 It (9.1 m)	20.2 It (6.2 m)	29.2 It (8.9 m)	38.5 It (11.7 m)	18.1 It (5.5 m)	9.0 It (2.7 m)
CMDR 5050													
TM Winch	30,000lb (13,608 kg)	15,300lb (6,940 kg)	7.0 It (2.1 m)	5.2 It (1.6 m)	3.4 It (1.0 m)	50.5 It (15.4 m)	40.7 It (12.4 m)	30.8 It (9.4 m)	21.1 It (6.4 m)	31.1 It (9.5 m)	41.1 It (12.5 m)	18.1 It (5.5 m)	10.0 It (3.0 m)
PG Winch	27,820lb (12,619 kg)	13,650lb (6,192 kg)	6.9 It (2.1 m)	5.7 It (1.7 m)	4.0 It (1.2 m)	49.9 It (15.2 m)	39.7 It (12.1 m)	29.9 It (9.1 m)	20.2 It (6.2 m)	30.2 It (9.2 m)	40.5 It (12.3 m)	18.1 It (5.5 m)	10.0 It (3.0 m)
CMDR 5052													
TM Winch	30,000lb (13,608 kg)	15,260lb (6,922 kg)	7.3 It (2.2 m)	5.3 It (1.6 m)	3.4 It (1.0 m)	52.5 It (16.0 m)	41.7 It (12.7 m)	30.8 It (9.4 m)	21.1 It (6.4 m)	32.1 It (9.8 m)	43.1 It (13.1 m)	18.1 It (5.5 m)	11.0 It (3.4 m)
PG Winch	27,790lb (12,606 kg)	13,600lb (6,169 kg)	7.2 It (2.2 m)	5.9 It (2.0 m)	4.0 It (1.2 m)	51.9 It (15.8 m)	40.7 It (12.4 m)	29.9 It (9.1 m)	20.2 It (6.2 m)	31.2 It (9.5 m)	42.5 It (13.0 m)	18.1 It (5.5 m)	11.0 It (3.4 m)
CMDR 5055													
TM Winch	30,000lb (13,608 kg)	14,400lb (6,532 kg)	7.9 It (2.4 m)	5.9 It (1.8 m)	3.9 It (1.2 m)	55.5 It (16.9 m)	44.6 It (13.6 m)	33.8 It (10.3 m)	24.1 It (7.3 m)	35.1 It (10.7 m)	46.1 It (14.1 m)	21.1 It (6.4 m)	11.0 It (3.4 m)
PG Winch	24,300lb (11,022 kg)	12,850lb (5,829 kg)	7.8 It (2.4 m)	6.4 It (2.0 m)	4.5 It (1.4 m)	54.9 It (16.7 m)	43.6 It (13.3 m)	32.8 It (10.0 m)	23.2 It (7.1 m)	34.2 It (10.4 m)	45.5 It (13.9 m)	21.1 It (6.4 m)	11.0 It (3.4 m)

Photographs and illustrations represented in this literature are for informational purposes only and may depict optional or additional equipment not offered as standard. Always refer to the appropriate operator's manual for safe and proper operation of TEREX Telelect equipment. TEREX Telelect reserves the right to make design changes as necessary.

For More Information:

~TEREX
Utilities

600 Oakwood Road
PO BOX 1150
Watertown, SD 57201
USA

Phone: (605) 882-4000
Facsimile: (605) 882-1842

www.terexutilities.com
E-mail: sales@terexutilities.com