


Prepared For:
 CITY OF TALLAHASSEE
 John McIntyre
 PROCUREMENT SERVICES OFF
 TALLAHASSEE, FL 32301-1731
 (850)891 - 8282
 Reference ID: N/A

Presented By:
 WARD INTERNATIONAL TRUCK
 JERRY LIVINGS
 4856 BLOUNTSTOWN HIGHWAY
 TALLAHASSEE FL 32304 -
 (850)701-0111

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

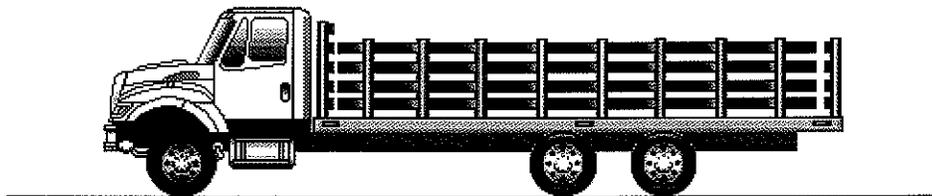

Model Profile
2012 7400 SBA 6X4 (SF625)

APPLICATION:	Stake Flat
MISSION:	Requested GVWR: 32900. Calc. GVWR: 46000 Calc. Start / Grade Ability: 21.70% / 2.55% @ 55 MPH Calc. Geared Speed: 93.8 MPH
FUEL ECONOMY:	10.51 MPG @ 55 MPH
DIMENSION:	Wheelbase: 224.00, CA: 156.90, Axle to Frame: 96.00
ENGINE, DIESEL:	{MaxxFORCE DT} EPA 10, 270 HP @ 2200 RPM, 860 lb-ft Torque @ 1300 RPM, 2400 RPM Governed Speed
TRANSMISSION, AUTOMATIC:	{Allison 3000_HS} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; Includes Oil Level Sensor, Less PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max.
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity
AXLE, REAR, TANDEM:	{Meritor MT-34-14X-3DFR} Single Reduction, 0.375" (9.5mm) Wall Housing Thickness, 34,000- lb Capacity R Wheel Ends Gear Ratio: 4.11
CAB:	Conventional
TIRE, FRONT:	(2) 11R22.5 HSR2 (CONTINENTAL) 498 rev/mile, load range G, 14 ply
TIRE, REAR:	(8) 11R22.5 HSR2 (CONTINENTAL) 498 rev/mile, load range G, 14 ply
SUSPENSION, REAR, TANDEM:	{Hendrickson RT-403} Walking Beam Type 52" Axle Spacing; 40,000-lb Capacity With Rubber Center Bushings
PAINT:	Cab schematic 100GN Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
SF62500	Base Chassis, Model 7400 SBA 6X4 with 224.00 Wheelbase, 156.90 CA, and 96.00 Axle to Frame.
1CBU	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.125" x 3.580" x 0.312" (257.2mm x 90.9mm x 8.0mm); 480.0" (12192) Maximum OAL
1LLA	BUMPER, FRONT Steel, Swept Back <u>Includes</u> : BUMPER, FRONT Powder Coated Gray (Argent) Color
1WGY	WHEELBASE RANGE 221" (560cm) Through and Including 262" (665cm)
2ARW	AXLE, FRONT NON-DRIVING {Meritor MFS-12-143A} Wide Track, I-Beam Type, 12,000-lb Capacity <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
3ADC	SUSPENSION, FRONT, SPRING Parabolic, Taper Leaf; 12,000-lb Capacity; With Shock Absorbers <u>Includes</u> : SPRING PINS Rubber Bushings, Maintenance-Free <u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4091	BRAKE SYSTEM, AIR Dual System for Straight Truck Applications <u>Includes</u> : BRAKE LINES Color and Size Coded Nylon : DRAIN VALVE Twist-Type : DUST SHIELDS, FRONT BRAKE : DUST SHIELDS, REAR BRAKE : GAUGE, AIR PRESSURE (2) Air 1 and Air 2 Gauges; Located in Instrument Cluster : PARKING BRAKE CONTROL Yellow Knob, Located on Instrument Panel : PARKING BRAKE VALVE For Truck : QUICK RELEASE VALVE Bendix On Rear Axle for Spring Brake Release: 1 for 4x2, 2 for 6x4 : SLACK ADJUSTERS, FRONT Automatic : SLACK ADJUSTERS, REAR Automatic : SPRING BRAKE MODULATOR VALVE R-7 for 4x2, SR-7 with relay valve for 6x4 <u>Notes</u> : Rear Axle is Limited to 46,000-lb GAWR with Code 04091 BRAKE SYSTEM, AIR and Standard Rear Air Cam Brakes Regardless of Axle /Suspension Ordered.
4732	DRAIN VALVE {Berg} Manual; With Pull Chain, for Air Tank <u>Includes</u> : DRAIN VALVE Mounted in Wet Tank
4AZA	AIR BRAKE ABS {Bendix AntiLock Brake System} Full Vehicle Wheel Control System (4-Channel)
4ESX	BRAKE CHAMBERS, FRONT AXLE {Haldex} 20 SqIn
4EVL	BRAKE CHAMBERS, REAR AXLE {Haldex GC3030LHDHO} 30/30 Spring Brake <u>Includes</u> : BRAKE CHAMBERS, SPRING (2) Rear Parking; WITH TRUCK BRAKES: All 4x2, 4x4; WITH TRACTOR BRAKES: All 4x2, 4x4; 6x4 & 6x6 with Rear Tandem Axles Less Than 46,000-lb. or GVWR Less Than 54,000-lb. : BRAKE CHAMBERS, SPRING (4) Rear Parking; WITH TRUCK BRAKES: All 6x4, 6x6; WITH TRACTOR BRAKES: 6x4 & 6x6 with Rear Tandem Axles 46,000-lb. or Greater or GVWR of 54,000-lb. or Greater
4JCJ	BRAKES, FRONT, AIR CAM S-Cam; 16.5" x 5.0"; Includes 20 Sq. In. Long Stroke Brake Chambers

<u>Code</u>	<u>Description</u>
	<u>Notes</u> : The following features should be considered when calculating Front GAWR: Front Axles; Front Suspension; Brake System; Brakes, Front Air Cam; Wheels; Tires.
4NDB	BRAKES, REAR, AIR CAM S-Cam; 16.5" x 7.0"; Includes 30/30 Sq.In. Long Stroke Brake Chamber and Spring Actuated Parking Brake <u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
4SBC	AIR COMPRESSOR {Bendix Tu-Flo 550} 13.2 CFM Capacity
5AAA	STEERING COLUMN Stationary
5CAL	STEERING WHEEL 2-Spoke, 18" Diam., Black
5PSA	STEERING GEAR {Sheppard M-100} Power
7BDA	EXHAUST SYSTEM Single, Horizontal, Aftertreatment Device Frame Mounted Right Side Back of Cab, Includes Horizontal Tail Pipe <u>Includes</u> : EXHAUST HEIGHT 10' Exhaust Height - Based on Empty Chassis with Standard Components (+ or - 1" Height) : NOTE: The Horizontal Tailpipe Includes a Temperature Control Device
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment <u>Includes</u> : BATTERY BOX Steel with Plastic Lid : DATA LINK CONNECTOR For Vehicle Programming and Diagnostics In Cab : FUSES, ELECTRICAL SAE Blade-Type : HAZARD SWITCH Push On/Push Off, Located on Top of Steering Column Cover : HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever : HEADLIGHTS (2) Sealed Beam, Round, with Chrome Plated Bezels : HORN, ELECTRIC Single : JUMP START STUD Located on Positive Terminal of Outermost Battery : PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light : RUNNING LIGHT (2) Daytime, Included With Headlights : STARTER SWITCH Electric, Key Operated : STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector : TURN SIGNAL SWITCH Self-Cancelling for Trucks, Manual Cancelling for Tractors, with Lane Change Feature : TURN SIGNALS, FRONT Includes Reflectors and Auxiliary Side Turn Signals, Solid State Flashers; Flush Mounted : WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever : WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted : WIRING, CHASSIS Color Coded and Continuously Numbered
8GGZ	ALTERNATOR {Leece-Neville LBP2224H} Brush Type; 12 Volt 120 Amp. Capacity, Pad Mounted
8MEP	BATTERY SYSTEM {International} Maintenance-Free (2) 12-Volt 1300CCA Total
8RKB	RADIO {Panasonic CQ120} AM/FM, Includes Multiple Speakers, Includes Auxiliary Input <u>Includes</u> : SPEAKERS IN CAB (2) Dual-Cone with Deluxe Interior : SPEAKERS IN CAB (4) Coaxial with Premium Interior
8WTK	STARTING MOTOR {Delco Remy 38MT Type 300} 12 Volt; less Thermal Over-Crank Protection
8WWJ	INDICATOR, LOW COOLANT LEVEL With Audible Alarm

<u>Code</u>	<u>Description</u>
9HBM	GRILLE Stationary, Chrome
9WBC	FRONT END Tilting, Fiberglass, With Three Piece Construction; for 2007 & 2010 Emissions
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100 <u>Includes</u> : PAINT SCHEMATIC ID LETTERS "GN"
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
11001	CLUTCH Omit Item (Clutch & Control)
12NUR	ENGINE, DIESEL {MaxxForce DT} EPA 10, 270 HP @ 2200 RPM, 860 lb-ft Torque @ 1300 RPM, 2400 RPM Governed Speed <u>Includes</u> : AIR COMPRESSOR AIR SUPPLY LINE Naturally-Aspirated (Air Brake Chassis Only) : ANTI-FREEZE Red Shell Rotella Extended Life Coolant; -40 Degrees F/ -40 Degrees C; for MaxxForce Engines : COLD STARTING EQUIPMENT Intake Manifold Electric Grid Heater with Engine ECM Control : CRUISE CONTROL Electronic; Controls Integral to Steering Wheel : ENGINE OIL DRAIN PLUG Magnetic : ENGINE SHUTDOWN Electric, Key Operated : FUEL FILTER Included with Fuel/Water Separator : FUEL/WATER SEPARATOR Fuel/Water Separator and Fuel Filter in a Single Assembly; With Water-in-Fuel Sensor; Engine Mounted : GOVERNOR Electronic : OIL FILTER, ENGINE Spin-On Type : WET TYPE CYLINDER SLEEVES
12TSY	FAN DRIVE {Borg-Warner SA85} Viscous Type, Screw On <u>Includes</u> : FAN Nylon
12UAR	RADIATOR Aluminum, Cross Flow, Series System; 1228 SqIn Core and 648 SqIn Charge Air Cooler and 342 SqIn Low Temperature Radiator and With Transmission Oil Cooler <u>Includes</u> : DEAERATION SYSTEM with Surge Tank : HOSE CLAMPS, RADIATOR HOSES Gates Shrink Band Type; Thermoplastic Coolant Hose Clamps : RADIATOR HOSES Premium, Rubber
12UXG	FEDERAL EMISSIONS for 2010; MaxxForce DT Engines
12VBC	AIR CLEANER Single Element <u>Includes</u> : GAUGE, AIR CLEANER RESTRICTION Air Cleaner Mounted
12VXT	THROTTLE, HAND CONTROL Engine Speed Control; Electronic, Stationary, Variable Speed; Mounted on Steering Wheel
12VYP	ENGINE CONTROL, REMOTE MOUNTED - No Provision Furnished for Remote Mounted Engine Control
12WZE	EMISSION COMPLIANCE Federal, Does Not Comply With California Clean Air Regulations
13AHZ	TRANSMISSION, AUTOMATIC {Allison 3000_HS} 4th Generation Controls; Close Ratio, 5-Speed, With Overdrive; Includes Oil Level Sensor, Less PTO Provision, Less Retarder, With 80,000-lb GVW & GCW Max. <u>Includes</u> : OIL FILTER, TRANSMISSION Mounted on Transmission : TRANSMISSION OIL PAN Magnet in Oil Pan

<u>Code</u>	<u>Description</u>
13WBL	TRANSMISSION SHIFT CONTROL {Allison} Push-Button Type; for Allison 3000 & 4000 Series Transmission
13WLP	TRANSMISSION OIL Synthetic; 29 thru 42 Pints
13WUB	ALLISON SPARE INPUT/OUTPUT for Highway Series (HS); General Purpose Trucks
13WYK	SHIFT CONTROL PARAMETERS Allison Load Based Shift Schedules (LBSS)
14GXC	AXLE, REAR, TANDEM {Meritor MT-34-14X-3DFR} Single Reduction, 0.375" (9.5mm) Wall Housing Thickness, 34,000-lb Capacity R Wheel Ends . Gear Ratio: 4.11
	<u>Includes</u> : POWER DIVIDER LOCK Electric over Air Operated, Cab Control with Indicator Light : REAR AXLE DRAIN PLUG (2) Magnetic, For Tandem Rear Axle
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
14UHC	SUSPENSION, REAR, TANDEM {Hendrickson RT-403} Walking Beam Type 52" Axle Spacing; 40,000-lb Capacity With Rubber Center Bushings
	<u>Includes</u> : CROSSMEMBER, SUSPENSION Stamped Steel Double Dogbone
	<u>Notes</u> : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
14WAL	SUSPENSION/REAR-AXLE IDENTITY for Meritor Tandem Rear Axles With Bar-Pin Beam Attachment Type Suspensions
15SGK	FUEL TANK Top Draw; D Style, Non Polished Aluminum, 50 U.S. Gal., 189 L Capacity, 16" Deep, With Quick Connect Outlet, Mounted Right Side, Under Cab
16030	CAB Conventional
	<u>Includes</u> : ARM REST (2) Molded Plastic; One Each Door : CLEARANCE/MARKER LIGHTS (5) Flush Mounted : COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window : CUP HOLDERS Two Cup Holders, Located in Lower Center of Instrument Panel : DOME LIGHT, CAB Rectangular, Door Activated and Push On-Off at Light Lens, Timed Theater Dimming, Integral to Console, Center Mounted : GLASS, ALL WINDOWS Tinted : GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side : GRAB HANDLE, CAB INTERIOR (2) Front of "B" Pillar Mounted, One Each Side : INTERIOR SHEET METAL Upper Door (Above Window Ledge) Painted Exterior Color : STEP (4) Two Steps Per Door
16400	SEAT, PASSENGER Omit Item
16HBA	GAUGE CLUSTER English With English Electronic Speedometer
	<u>Includes</u> : GAUGE CLUSTER (6) Engine Oil Pressure (Electronic), Water Temperature (Electronic), Fuel (Electronic), Tachometer (Electronic), Voltmeter, Washer Fluid Level : ODOMETER DISPLAY, Miles, Trip Miles, Engine Hours, Trip Hours, Fault Code Readout : WARNING SYSTEM Low Fuel, Low Oil Pressure, High Engine Coolant Temp, and Low Battery Voltage (Visual and Audible)
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16JPU	SEAT, FRONT BENCH {Gra-Mag} Full Width; Vinyl, With Fixed Mid Back

<u>Code</u>	<u>Description</u>
	<u>Includes</u> : SEAT BELT (3) Two 3-Point Shoulder Belts for Driver and Outer Passenger and One 2-Point Lap Belt for Center Passenger
16SDA	MIRRORS (2) {Lang Mekra} Rectangular, 7.44" x 14.84" & 7.44" sq. Convex Right Side Only, 102" Inside Spacing, Breakaway Type
16WCT	AIR CONDITIONER {Blend-Air} With Integral Heater & Defroster <u>Includes</u> : HEATER HOSES Premium : HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps : REFRIGERANT Hydrofluorocarbon HFC-134A
16WJS	INSTRUMENT PANEL Center Section, Flat Panel
16WKY	HVAC FRESH AIR FILTER
16WRX	CAB INTERIOR TRIM Deluxe <u>Includes</u> : "A" PILLAR COVER Molded Plastic : CAB INTERIOR TRIM PANELS Cloth Covered Molded Plastic, Full Height; All Exposed Interior Sheet Metal is Covered Except for the Following: with a Two-Man Passenger Seat or with a Full Bench Seat the Back Panel is Completely Void of Covering : CONSOLE, OVERHEAD Molded Plastic; With Dual Storage Pockets with Retainer Nets and CB Radio Pocket : DOOR TRIM PANELS Molded Plastic; Driver and Passenger Doors : FLOOR COVERING Rubber, Black : HEADLINER Soft Padded Cloth : INSTRUMENT PANEL TRIM Molded Plastic with Black Center Section : STORAGE POCKET, DOOR (1) Molded Plastic, Full-Length; Driver Door : SUN VISOR (2) Padded Vinyl with Driver Side Toll Ticket Strap, Integral to Console
16WSK	CAB REAR SUSPENSION Air Bag Type
27DNS	WHEELS, FRONT DISC; 22.5" Painted Steel, 10-Stud (285.75MM BC) Hub Piloted, 5 Hand Hold, Flanged Nut, Metric Mount, 7.50 DC Rims; With Steel Hubs. <u>Includes</u> : PAINT IDENTITY, FRONT WHEELS White <u>Notes</u> : Compatible Tire Sizes: 9R22.5, 10R22.5, 11R22.5, 235/80R22.5, 245/75R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5
28DMA	WHEELS, REAR DUAL DISC; 22.5" Painted Steel, 2 Hand Hole, 10-Stud (285.75MM BC) Hub Piloted, Flanged Nut, Metric Mount, 8.25 DC Rims; With Steel Hubs <u>Includes</u> : PAINT IDENTITY, REAR WHEELS White <u>Notes</u> : Compatible Tire Sizes: 11R22.5, 12R22.5, 255/70R22.5, 255/80R22.5, 265/75R22.5, 275/70R22.5, 275/80R22.5, 295/75R22.5, 295/80R22.5 : The following features should be considered when calculating Rear GAWR: Rear Axles; Rear Suspension; Brake System; Brakes, Rear Air Cam; Brake Shoes, Rear; Special Rating, GAWR; Wheels; Tires.
7372135415	(2) TIRE, FRONT 11R22.5 HSR2 (CONTINENTAL) 498 rev/mile, load range G, 14 ply
7372135415	(8) TIRE, REAR 11R22.5 HSR2 (CONTINENTAL) 498 rev/mile, load range G, 14 ply

<u>Description</u>	<u>(USA DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$97,872.00	
Service Items	\$0.00	
Total Factory List Price Including Options:		\$97,872.00
Freight Charge	\$1,830.00	
Total Freight:		\$1,830.00
Total Factory List Price Including Freight:		\$99,702.00
Less Customer Allowance:		(\$26,099.13)
Total Vehicle Price:		\$73,602.87
Total Sale Price:		\$73,602.87
Total Per Vehicle Sales Price:		\$73,602.87
Net Sales Price:		\$73,602.87

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

WARD INTERNATIONAL TRUCK
4856 BLOUNTSTOWN HIGHWAY
TALLAHASSEE FL 32304 -
(850)701-0111

**This proposal is not binding upon the seller without
Seller's Authorized Signature**

Official Title and Date